

**Declaration Owner**

The MPI Group, LLC
319 North Hills Road
Corbin, Kentucky 40701
1.606.767.3587 | www.metalproductsinc.com

Product

3 feet x 7 feet (0.91 m x 2.1 m) flush panel 18 gauge Heavy Duty (level 2) steel door with a polystyrene core conforming to ANSI/SDI A250.8-2007 (R2011). The product includes a prime painted finish conforming to ANSI A250.10.

EPD Number and Period of Validity

SCS-EPD-05021
EPD Valid June 15, 2018 through June 14, 2023

Product Category Rule

Product Category Rule (PCR) for Preparing an Environmental Product Declaration (EPD) for Product Group: Commercial Steel Doors and/or Steel Frames UL 9005. Version: March 10, 2015

Program Operator

SCS Global Services
2000 Powell Street, Ste. 600, Emeryville, CA 94608
+1.510.452.8000 | www.SCSglobalServices.com

Table of Contents

EPD Summary.....cover

About MPI.....2

Product Information2

Life Cycle Assessment4


References11

Disclaimers: This EPD conforms to ISO 14025, 14040, ISO 14044, and ISO 21930.

Scope of Results Reported: The PCR requirements limit the scope of the LCA metrics such that the results exclude environmental and social performance benchmarks and thresholds, and exclude impacts from the depletion of natural resources, land use ecological impacts, ocean impacts related to greenhouse gas emissions, risks from hazardous wastes and impacts linked to hazardous chemical emissions.

Accuracy of Results: Due to PCR constraints, this EPD provides estimations of potential impacts that are inherently limited in terms of accuracy.

Comparability: The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

| | |
|---|---|
| PCR review, was conducted by | The Independent Expert Committee, SVR |
| Approved Date: June 15, 2018 – End Date: June 14, 2023 | |
| Independent verification of the declaration and data, according to ISO 14025:2006 | <input type="checkbox"/> internal <input checked="" type="checkbox"/> external |
| Third party verifier |  <hr/> Tom Gloria, Ph.D., Industrial Ecology Consultants |

ABOUT MPI

Founded in 1980, MPI has become a leading manufacturer of custom steel doors, frames and accessories. The company's modern production facilities of more than 55,000 square feet are located in Corbin, KY, USA adjacent to the main offices. Facilities include an advanced Amada Fabrication Center housing automated punching and forming equipment.

MPI produces custom steel doors and frames for distribution nationally and internationally. As an active member of the Steel Door Institute (SDI) and the National Association of Architectural Metal Manufacturers (NAAMM), MPI adheres to the manufacturing specifications established by the SDI and the Hollow Metal Manufacturers Association (HMMA) division of NAAMM. Products meet or exceed requirements of specification standards ANSI A250.8 and ANSI A250.4. MPI offers a wide range of doors and frames in various thicknesses ranging from .042 to .093 steel. Products are manufactured from highest quality commercial grade steel in cold-rolled, A60 galvalneal or G90 galvalneal.

Quality and excellence in all phases of operation have brought MPI the recognition as a leading manufacturer of custom doors and frames. Custom means every door and frame is carefully hand-crafted to exact specifications. We do not pull components from a shelf, modify them and ship to a jobsite. When MPI says "custom", it means fully custom manufactured.

PRODUCT INFORMATION

Product description

The product in this Environmental Product Declaration (EPD) is a 3 feet x 7 feet (0.91 m x 2.1 m) flush panel 18 gauge Heavy Duty (level 2) steel door with a polystyrene core conforming to ANSI/SDI A250.8-2007 (R2011)¹. Additionally, the final commercial steel door includes a prime painted finish conforming to ANSI A250.10. Closer reinforcement, 4.5" hinge preps, and 161 mortise hardware reinforcement are included, however, the hardware itself (e.g., hinges or exit devices) are not included. In accordance with the PCR, the product in this EPD is based on a specific product manufactured at the MPI facility in Corbin, KY.

Product application

The final product is designed and intended to be used for commercial applications.

Product characterization

The final product is packaged and delivered to customer with installation instructions and/or manuals.

Technical information

The technical specifications for the product in this EPD are listed below.

- ANSI/SDI A250.8-2007 (R2011)
- Includes a prime painted finish conforming to ANSI A250.10.
- Steady-state thermal transmittance and performance rating based on SDI-113-13 Standard Practice for Determining the Steady-State Thermal Transmittance of Steel Door and Frame Assemblies
- Air Leakage rate based on ANSI/UL 1784-2001 Air Leakage Test of Door Assemblies
- Indoor-outdoor sound attenuation according to ASTM E1332 Standard Classification for Rating Outdoor-Indoor Sound Attenuation
- Deflection/loading based on ASTM E330 Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights, and Curtain Walls by Uniform Static Air Pressure Difference

¹ A scaling factor of 0.0476 can be used to translate results per declared unit to one square foot.

Product composition

The material composition and recycled content of the product and its packaging are presented in Table 1. Values are rounded to three significant figures.

Table 1. Material composition of one commercial steel door of nominal dimensions of 3-ft by 7-ft considered in isolation, including packaging.

| Product | | | | |
|------------------|--------------|------------------|------------------|-------------------|
| Material | Value (kg) | Percent of Total | Pre-Consumer (%) | Post-Consumer (%) |
| Steel | 40.3 | 93.2% | 30.3% | 58.9% |
| Polystyrene | 0.907 | 2.10% | 0% | 0% |
| Prime Paint | 1.75 | 4.05% | 0% | 0% |
| Adhesive | 0.283 | 0.655% | 0% | 0% |
| Total | 43.3 | 100% | 28.2% | 54.9% |
| Packaging | | | | |
| Corrugated Board | 0.227 | 100% | 0% | 40.0% |
| Total | 0.227 | 100% | 0% | 40.0% |

Product manufacture

Once steel sheet or coil is delivered to the manufacturing facility, it is sheared (die cut) and punched in preparation for forming (reshaping). Reinforcements are then welded on formed sheets before all parts are sent for washing to remove oils and other contaminants in preparation for prime painting. Afterward, the polystyrene core is fitted and bonded. Ultimately, the channels are inserted and welded to each panel before being sent for prime painting and curing. The final product is then packaged for shipping.

Delivery status

The final product is delivered to customer as a 3 feet x 7 feet (0.91 m x 2.1 m) flush panel 18 gauge Heavy Duty (level 2) steel door with a polystyrene core.

Product installation

Product installation shall conform to the instructions provided by the manufacturer and ANSI/SDI A250.11. Installation instruction are available on the MPI website: http://www.metalproductsinc.com/html/document_center.html

Environment and health during use

There are no environmental or health considerations during the use of the product.

End-of-Life

The scope of this EPD is cradle-to-gate and therefore excludes end-of-life.

Further information

Further information on the product covered by this EPD can be found on at: http://www.metalproductsinc.com/html/doors_.html

LIFE CYCLE ASSESSMENT

Declared Unit

The declared unit is defined as one commercial steel door of nominal dimensions of 3-feet by 7-feet (0.91 m by 2.1 m) considered in isolation. The product includes a prime painted finish conforming to ANSI A250.10. The final product weight is 43.3 kg.

System Boundary

This LCA study is cradle-to-gate, which includes raw material supply (A1), transport (A2), and manufacturing (A3). The benefits and loads beyond the system boundary for reuse, recovery, and recycling potential (module D) are not included in this study. The cradle-to-gate boundary includes all unit processes contributing measurably to the category indicator results. Elements that are excluded from each system's boundary include the following:


- Construction activities, capital equipment, and infrastructure;
- Maintenance and operation of capital equipment; and
- Personnel travel and resource use.

The deletion of these processes and inputs is permitted since it is not expected to significantly change the overall conclusions of the study. A general description of each life cycle stage, in accordance with the PCR, is provided below.

- **Raw material supply (A1)** – This stage includes extraction of virgin materials and reclamation of non-virgin feedstock. Resource use and emissions associated with both extraction of the raw materials, material processing, and product component manufacturing are included.
- **Transport (A2)** – This stage is associated with the transport of the processed raw materials to the manufacturing facility and any internal transport.
- **Manufacturing (A3)** – This stage includes all the relevant manufacturing processes and flows, including the impacts from energy use and emissions at the facility. Production of capital goods, infrastructure, manufacturing equipment, and personnel-related activities are not included. The production of packaging and ancillary materials is included, as well as any waste for processing or disposal.



The diagram below is a representation of the most significant contributions to the product system.

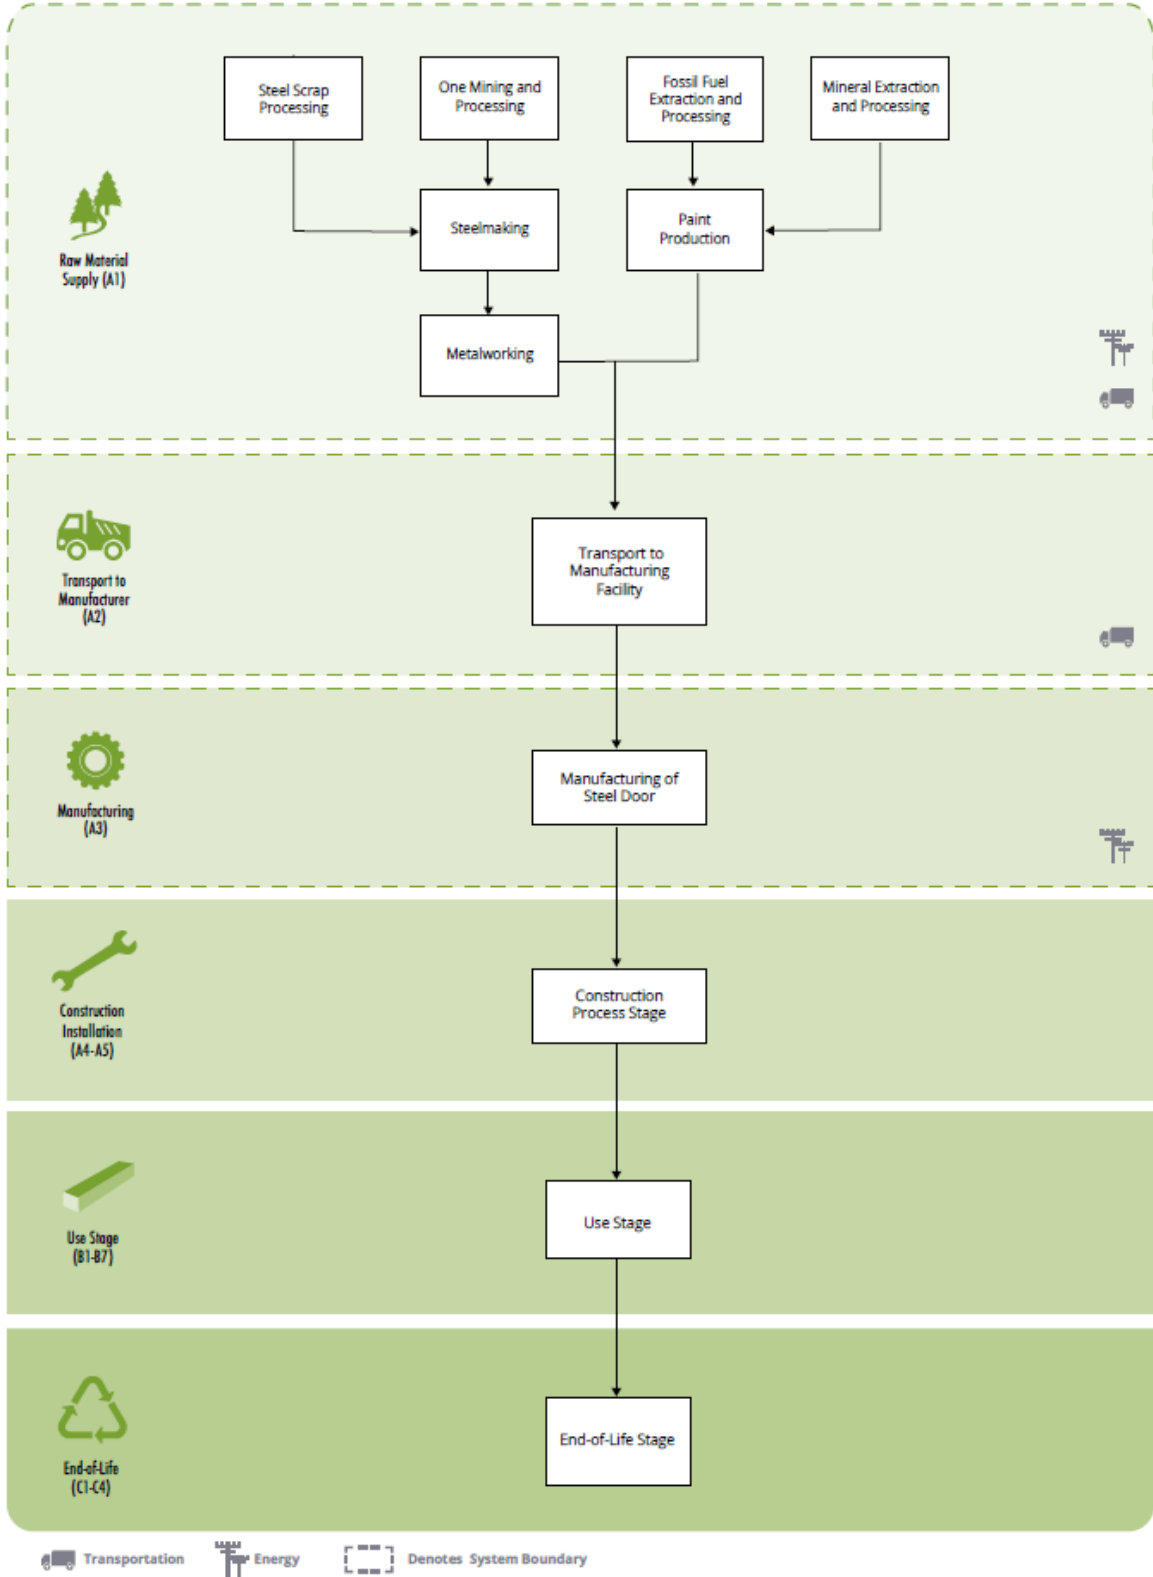

Estimates and Assumptions

The assessment relied on several assumptions, described below.

- Representative inventory data from Ecoinvent v3.3 and eGRID2014 were used to reflect the energy mix for electricity use at the manufacturing facility.
- Life cycle inventory data were modeled with data taken from Ecoinvent v3.3.

Cut-off Criteria

All known materials and processed were included in the inventory. The cut-off criteria for including or excluding materials, energy, and emissions data are in accordance with the PCR and are listed below.

- Mass and energy flows that consist of less than 1% may be omitted from a unit process
- Cumulative omitted mass or energy flows shall not exceed 5%

Background Data

Unit processes are developed with SimaPro v8.3 software. The following primary data were provided for modeling:

- Material types and amounts required for manufacturing and packaging, including scrap rate.
- MSDS for several material inputs used for manufacturing.
- Upstream transport of materials for manufacturing and packaging; specifically, modes and distances.
- Annual production, resource use (e.g., electricity, natural gas, water, etc.), waste, and emissions released at the manufacturing facility.

Secondary life cycle inventory data are taken from Ecoinvent v3.3 and eGRID2014.



Data Quality

| Data Quality Parameter | Data Quality Discussion |
|--|--|
| Time-Related Coverage Age of data and the minimum length of time over which data is collected | Manufacturing data are based on 2016 annual production. Representative datasets (secondary data) used for upstream and background processes are generally less than 5 years old. All primary data used represented an average of at least one year's worth of data collection. |
| Geographical Coverage Geographical area from which data for unit processes is collected to satisfy the goal of the study | The data used in the analysis provide the best possible representation available with current data. Representative data used in the assessment are representative of US, Global, or "Rest-of-World" (average for all countries in the world with uncertainty adjusted). Datasets chosen are considered sufficiently similar to actual geographical coverage of processes. Furthermore, regional information allowed for specific energy mixes for electricity use to be modeled. |
| Technology Coverage Specific technology or technology mix | For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations. |
| Precision Measure of the variability of the data values for each data expressed (e.g. variance) | Precision of results are not quantified due to a lack of data. Data collected for operations were typically averaged for one year and over multiple operations, which is expected to reduce the variability of results. |
| Completeness Percentage of flow that is measured or estimated | Except where noted, the LCA model included all known mass and energy flows. In some instances, surrogate data used to represent upstream operations may be missing some data which is propagated in the model. No known processes or activities were excluded; in total, these missing data represent less than 5% of the cumulative omitted mass or energy flows. |
| Representativeness Qualitative assessment of the degree to which the data set reflects the true population of interest (i.e. geographical coverage, time period and technology coverage) | <p>Data used in the assessment represent typical or average processes as currently reported from multiple data sources and are therefore generally representative of the range of actual processes and technologies for production of these materials.</p> <p>Considerable deviation may exist among actual processes on a site-specific basis; however, such a determination would require detailed primary data collection throughout the supply chain back to resource extraction. Some proxy datasets are used to represent material ingredients due to the lack of specific datasets available.</p> |
| Consistency Qualitative assessment of whether the study methodology is applied uniformly to the various components of the analysis | The consistency of the assessment is considered to be high. Data sources of similar quality and age are used, which are taken from Ecoinvent v3.3. Different portions of the product life cycle are equally considered. |
| Reproducibility Qualitative assessment of the extent to which information about the methodology and data values would allow an independent practitioner to reproduce the results reported in the study | Based on the description of data and assumptions used, this assessment would be reproducible by other practitioners. All assumptions, models, and data sources are documented. |
| Sources of the Data Description of all primary and secondary data sources | The following primary data were provided: 1) material types and amounts required for manufacturing and packaging of the products under scope, including scrap rate; 2) MSDS for several material inputs used for manufacturing of the products under scope; 3) upstream transport of materials for manufacturing and packaging of the products under scope (modes and distances); 4) annual production, resource use, waste, and emissions released during manufacturing. Where primary upstream data were unavailable, secondary data were taken from Ecoinvent v3.3. |
| Uncertainty of the Information Uncertainty related to data, models, and assumptions | Uncertainty related to the product materials and packaging is low. Data for upstream operations relied upon use of existing representative datasets. These datasets contained relatively recent data (<5 years), but lacked specific geographical representativeness with the exception of a regionalized electricity grid when known. Uncertainty related to the impact assessment methods used in the study are high. The impact methods required by the PCR include impact potentials, which lack characterization of providing and receiving environments or tipping points. |

Period under Consideration

The period of review is calendar year 2016.

Allocation

Manufacturing resource use and emissions were allocated to the product on a mass basis as a fraction of total annual production. The product includes recycled content, which are allocated using the recycled content allocation method, also known as the 100-0 cut off method. Impacts from transportation were allocated based on the mass of material and distance transported.

Comparability

The PCR this EPD is based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner’s assumptions, the source of the data used in the study, and the specifics of the product modeled.

LCA Results

The diagram below illustrates the life cycle stages included in this EPD.

| Product | | | Construction Process | | Use | | | | | | | End-of-life | | | | Benefits and loads beyond the system boundary |
|---------------------|-----------|---------------|----------------------|--------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|---------------------------|-----------|------------------|----------|---|
| A1 | A2 | A3 | A4 | A5 | B1 | B1 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| Raw material supply | Transport | Manufacturing | Transport | Installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction demolition | Transport | Waste processing | Disposal | Reuse, recovery and/or recycling potential |
| X | X | X | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND |

X = Included in system boundary; MND = Module not declared

The choice of categories and indicators used in the assessment are taken from the PCR. Impact category indicators are estimated using TRACI 2.1. All results are rounded to two significant digits.

Table 2. List of impact categories, impact category acronyms, LCIA method, and units for reporting of results.

| Impact Category | Acronym | LCIA Method | Reporting Unit |
|--|---------|-------------|------------------------------|
| Global Warming Potential | GWP | TRACI 2.1 | Kilograms CO ₂ eq |
| Acidification Potential | AP | TRACI 2.1 | Kilograms SO ₂ eq |
| Photochemical oxidant creation potential | POCP | TRACI 2.1 | Kilograms O ₃ eq |
| Eutrophication Potential | EP | TRACI 2.1 | Kilograms N eq |
| Ozone Depletion Potential | ODP | TRACI 2.1 | Kilograms CFC-11 eq |
| Fossil Fuel Depletion | FFD | TRACI 2.1 | MJ surplus |

Table 3. LCIA results reported for one commercial steel door of nominal dimensions of 3-ft by 7-ft considered in isolation.

| Module | GWP (kg CO ₂ eq) | ODP (kg CFC-11 eq) | AP (kg SO ₂ eq) | EP (kg N eq) | SP (kg O ₃ eq) | FFD (MJ) |
|--------|--------------------------------|-----------------------|-------------------------------|----------------------|------------------------------|-------------|
| Total | 81 | 4.6x10 ⁻⁶ | 0.46 | 0.33 | 4.5 | 80 |
| | 100% | 100% | 100% | 100% | 100% | 100% |
| A1 | 48 | 3.1x10 ⁻⁶ | 0.25 | 0.20 | 2.7 | 56 |
| | 59% | 69% | 54% | 62% | 61% | 70% |
| A2 | 2.8 | 5.2x10 ⁻⁷ | 1.3x10 ⁻² | 3.1x10 ⁻³ | 0.30 | 6.1 |
| | 3.5% | 11% | 2.8% | 0.95% | 6.7% | 7.6% |
| A3 | 31 | 9.0x10 ⁻⁷ | 0.20 | 0.12 | 1.5 | 18 |
| | 38% | 20% | 43% | 37% | 33% | 22% |

The key life cycle inventory data parameters are taken from the PCR, which include resource use, output flows, and waste categories. All results are rounded to two significant digits. Results reported in MJ are calculated using lower heating values. Results reported as *INA* represent “indicators not assessed”.

Table 4. List of key life cycle inventory parameters, parameter acronyms, and units for reporting of results.

| Key Life Cycle Inventory Parameter | Acronym | Reporting Unit |
|--|---------|----------------|
| Renewable primary energy as energy carrier | PERE | Megajoules |
| Renewable primary energy resources as material utilization | PERM | Megajoules |
| Total use of renewable primary energy resources | PERT | Megajoules |
| Non-renewable primary energy as energy carrier | PENRE | Megajoules |
| Non-renewable primary energy as material utilization | PENRM | Megajoules |
| Total use of non-renewable primary energy resources | PENRT | Megajoules |
| Use of secondary material | SM | Kilograms |
| Use of renewable secondary fuels | RSF | Megajoules |
| Use of non-renewable secondary fuels | NRSF | Megajoules |
| Use of net fresh water | FW | Cubic meters |
| Hazardous waste disposed | HWD | Kilograms |
| Non-hazardous waste disposed | NHWD | Kilograms |
| Radioactive waste disposed | RWD | Kilograms |
| Components for re-use | CRU | Kilograms |
| Materials for recycling | MFR | Kilograms |
| Materials for energy recovery | MER | Kilograms |
| Exported electric energy | EEE | Megajoules |
| Exported thermal energy | EET | Megajoules |

Table 5. Resource use results for one commercial steel door of nominal dimensions of 3-ft by 7-ft considered in isolation.

| Module | PERE (MJ) | PERM (MJ) | PERT (MJ) | PENRE (MJ) | PENRM (MJ) | PENRT (MJ) | SM (kg) | RSF (MJ) | NRSF (MJ) | FW (m ³) |
|--------|-----------|-----------|-----------|------------|------------|------------|---------|----------|-----------|----------------------|
| Total | 130 | 0.16 | 130 | 1,300 | INA | 1,300 | 36 | INA | INA | 4.1 |
| A1 | 29 | 0.0 | 29 | 780 | INA | 780 | 0.0 | INA | INA | 3.0 |
| A2 | 0.55 | 0.0 | 0.55 | 45 | INA | 45 | 0.0 | INA | INA | 3.1x10 ⁻² |
| A3 | 100 | 0.16 | 100 | 490 | INA | 490 | 36 | INA | INA | 1.05 |

Table 6. Waste and outflows for one commercial steel door of nominal dimensions of 3-ft by 7-ft considered in isolation.

| Module | HWD (kg) | NHWD (kg) | RWD (kg) | CRU (kg) | MFR (kg) | MER (kg) | EEE (MJ) | EET (MJ) |
|--------|----------------------|-----------|----------------------|----------|----------|----------|----------|----------|
| Total | 2.2x10 ⁻³ | 16 | 5.4x10 ⁻⁴ | 0.0 | 9.9 | INA | INA | INA |
| A1 | 1.5x10 ⁻³ | 12 | 3.0x10 ⁻⁴ | 0.0 | 0.0 | INA | INA | INA |
| A2 | 2.5x10 ⁻⁵ | 2.0 | 4.9x10 ⁻⁵ | 0.0 | 0.0 | INA | INA | INA |
| A3 | 7.2x10 ⁻⁴ | 1.5 | 1.9x10 ⁻⁴ | 0.0 | 9.9 | INA | INA | INA |

LCA Interpretation

The interpretation phase conforms to ISO 14044 with further guidance from the International Reference Life Cycle Data System (ILCD) General Guide for Life Cycle Assessment. The interpretation included the use of evaluation and sensitivity checks to steer the iterative process during the assessment, and a final evaluation including completeness, sensitivity, and consistency checks, at the end of the study.

Generally, the contribution to environmental impacts from raw material extraction and processing (A1) is the largest, followed by product manufacturing (A3). The contribution to environmental impacts from the transport of raw materials to manufacturing facility (A2) is relatively small with respect to the other modules of the product stage.



REFERENCES

1. American National Standards Institute (ANSI), 1899 L Street, NW, 11th Floor, Washington, DC 20036, www.ansi.org
2. ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA, 19428-2959 USA.
<http://www.astm.org/Standard/index.shtml>
3. ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
4. ISO 14040: 2006 Environmental Management – Life cycle assessment – Principles and framework.
5. ISO 14044: 2006 Environmental Management – Life cycle assessment – Requirements and Guidelines.
6. ISO 21930: 2007 Sustainability in building construction – Environmental declaration of building products.
7. Life Cycle Assessment of a Commercial Steel Door and Steel Frame. SCS Global Services Final Report. Prepared for Steel Door Institute and the following participants: Deansteel Manufacturing Company, Inc., Door Components, Inc d.b.a DCI Hollow Metal, Mesker Door, Pioneer Industries, Republic Doors & Frames, Steelcraft, and The MPI Group, LLC. May 2018.
8. Product Category Rule (PCR) for Preparing an Environmental Product Declaration (EPD) for Product Group: Commercial Steel Doors and/or Steel Frames UL 9005. Version: March 10, 2015.
9. SCS Type III Environmental Declaration Program: Program Operator Manual. V9.0 January 2018. SCS Global Services.
10. Steel Door Institute (SDI), 30200 Detroit Road, Westlake, Ohio 44145, <https://www.steeldoor.org/ansi.php>;
https://www.steeldoor.org/tech_data.php
11. Ryberg, M., M. Vieira, M. Zgola, J. Bare, AND R. Rosenbaum. Updated US and Canadian Normalization Factors for TRACI 2.1. CLEAN TECHNOLOGIES ENVIRONMENTAL POLICY. Springer, New York, NY, 16(2):329-339, (2014).
12. Wernet, G., Bauer, C., Steubing, B., Reinhard, J., Moreno-Ruiz, E., and Weidema, B., 2016. The ecoinvent database version 3 (part I): overview and methodology. The International Journal of Life Cycle Assessment, [online] 21(9), pp.1218–1230. Available at: <http://link.springer.com/10.1007/s11367-016-1087-8>.



For more information contact:

The MPI Group, LLC

319 North Hills Road

Corbin, Kentucky 40701

1-606-767-3587 | dmcconnell@metalproductsinc.com | www.metalproductsinc.com



SCS Global Services

2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA

Main +1.510.452.8000 | fax +1.510.452.8001